

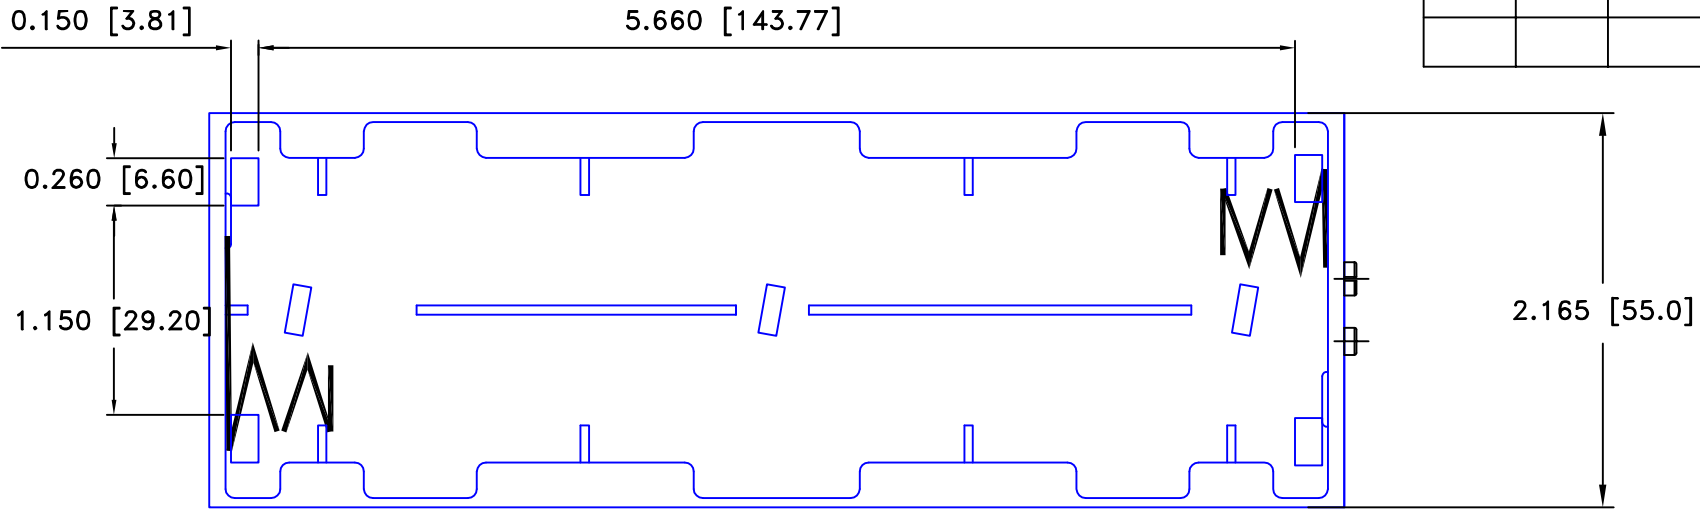


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
4/22/06	A	Added "ROHS COMPLIANT"	T.B.	B.S.	

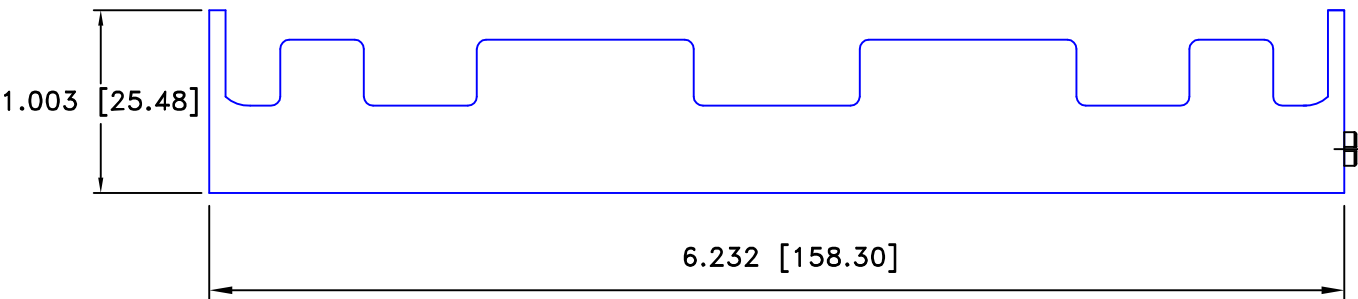


9 VOLT SNAPS TYPE SHOWN

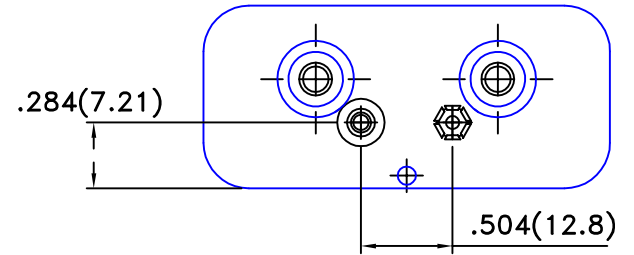

ORDERING CODE BH26C

SPECIFICATION:
 1. MATERIAL:
 HOUSING : BLACK POLYPROPYLENE, PP-1040
 FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959
 TEMPERATURE RANGE: -10°C to +100°C
 RIVETS: BRASS, NICKLE PLTD.
 SPRING: SPRING STEEL, NICKLE PLTD.
 WIRE: 26AWG, UL1007, CSA, TR64
 9VOLT SNAPS: BRASS, NICKLE PLATED
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER
 EIA-540J000
 ROHS COMPLIANT

L- Solder Lugs
 W-(6") Wire Leads
 SF-9Volt type snaps
 B- Bump plates

Tolerance (Except as noted)		Memory Protection Devices, Inc	
		200 Broad Hollow Road, Farmingdale, New York 11735	
decimal ±.5 (.020)	Fractional ± .8 (.030)	Scale 1.5=1	Drawn By B.S.
		Approved By T.B.	
Angular ± 3°	Date 4/22/06	Title SIX "C" CELL HOLDER	
		Drawing Number BH26CSF	