



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

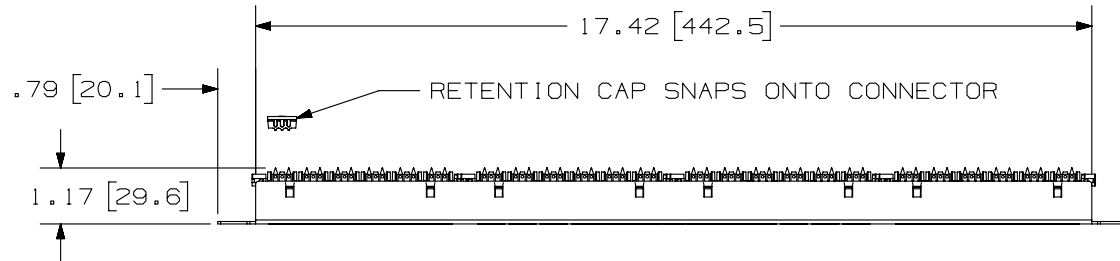

PANDUIT PART NO.	WEIGHT (APPROX.)
DP246X88TGY	1.25 lb (567 g)

NOTES:

- SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AS WELL AS OPTIONAL ICONS.
- MATERIAL:  
 PANEL HOUSING: STEEL  
 RJ45 MODULE: THERMOPLASTIC RESIN UL94V-0  
 PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0  
 BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B  
 RETENTION CAP:  
 THERMOPLASTIC RESIN UL94V-0
- 24 PORT PATCH PANEL 8 POSITION 8 WIRE.
- THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
- FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS AND (4) METRIC M6x1x15MM SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
- DIMENSIONS IN [ ] ARE IN METRIC.
- USE 110 STYLE TERMINATION TOOL FOR PUNCH DOWN.
- RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

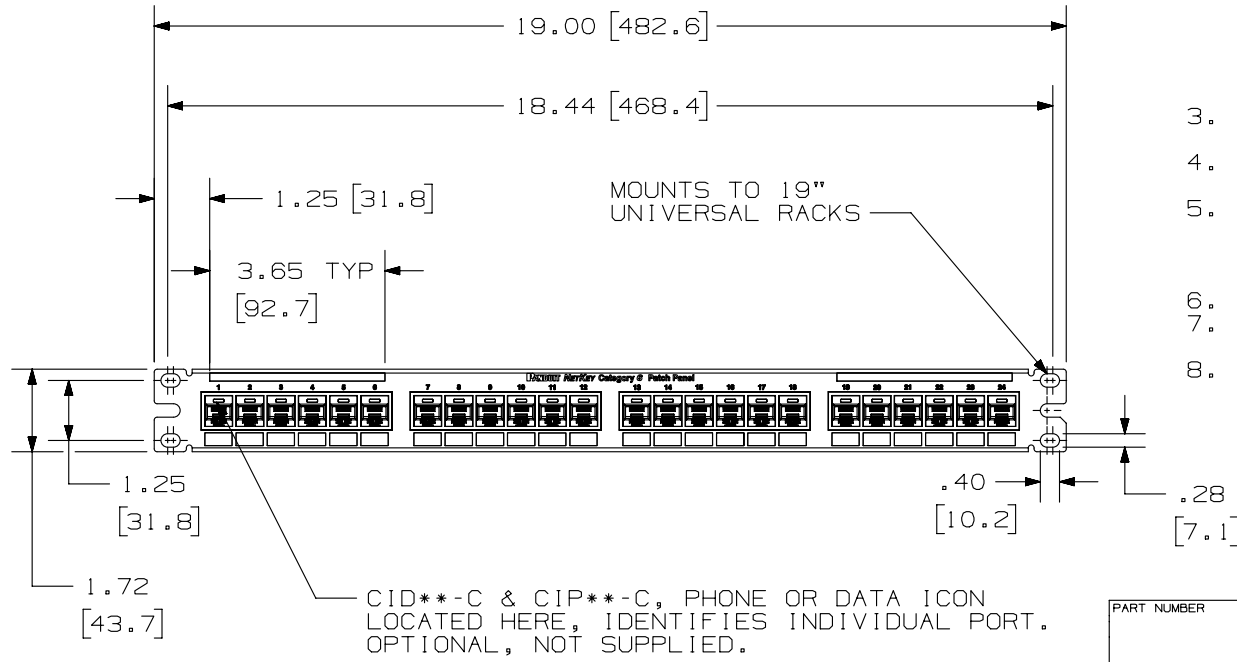

CID\*\*-C & CIP\*\*-C, PHONE OR DATA ICON LOCATED HERE, IDENTIFIES INDIVIDUAL PORT. OPTIONAL, NOT SUPPLIED.

PART NUMBER		DP246X88TGY	
TITLE			
DP6A 10GIG 24 PORT PATCH PANEL			
CUSTOMER DRAWING			
ITEM REVISION NAME		M02479JB/00	
DATASET FILE NAME		M02479JB_DC238/00B	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]		MATERIAL:	
.x ± .xxx ± .010 [ .3 ]		DRAWING NUMBER:	
.xx ± .03 [ .8 ]		02479-238	
ANGLES ±		THIRD ANGLE PROJECTION	
DRAWN BY		SCALE	
LZ		NONE	
DATE		SHT 1 OF 1	
3-4-06		A	
CHK		SIZE	
CEF		A	

2	6/18/14	JSP	REFR	MMR	REVISED AND REDRAWN, PREVIOUS REVISIONS HAVE BEEN OMITTED.	02479-238
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

D10100DA/14